

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Author's Docket No.

0039-7646-2RD

First Inventor or Application Identifier

Tatsunori KANAI, et al.

Title

SCHEME FOR SYSTEMATICALLY REGISTERING META-DATA WITH
RESPECT TO VARIOUS TYPES OF DATA

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g. PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification Total Pages **38**
3. ☒ Drawing(s) (35 U.S.C. 113) Total Sheets **11**
4. ☒ Oath or Declaration Total Pages **5**
 - a. ☒ Newly executed (original)
 - b. ☐ Copy from a prior application (37 C.F.R. §1.63(d))
(for continuation/divisional with box 15 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named
in the prior application, see 37 C.F.R. §1.63(d)(2) and
1.33(b).
5. ☐ Incorporation By Reference (usable if box 4B is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4B, is considered to be part
of the disclosure of the accompanying application and is hereby
incorporated by reference therein

ACCOMPANYING APPLICATION PARTS

6. ☐ Assignment Papers (cover sheet & document(s))
7. ☐ 37 C.F.R. §3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
8. ☐ English Translation Document (if applicable)
9. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations (7)
10. ☐ Preliminary Amendment
11. ☒ White Advance Serial No. Postcard
12. ☐ Small Entity Statement(s) ☐ Statement filed in prior application. Status still proper and desired.
13. ☒ Certified Copy of Priority Document(s) (1)
(if foreign priority is claimed)
14. ☒ Other: Notice of Priority, Statement of Relevancy

15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application no.:
Prior application information: Examiner: Group Art Unit:

16. Amend the specification by inserting before the first line the sentence:

- ☐ This application is a ☐ Continuation ☐ Division ☐ Continuation-in-part (CIP)
of application Serial No. Filed on
- ☐ This application claims priority of provisional application Serial No. Filed

17. CORRESPONDENCE ADDRESS

OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C.
FOURTH FLOOR
1755 JEFFERSON DAVIS HIGHWAY
ARLINGTON, VIRGINIA 22202
(703) 413-3000
FACSIMILE: (703) 413-2220

Name:	Marvin J. Spivak	Registration No.:	24,913
Signature:		Date:	3/22/00
Name:	Registration Number 41,124	Registration No.:	

SCHEME FOR SYSTEMATICALLY REGISTERING META-DATA
WITH RESPECT TO VARIOUS TYPES OF DATA

5 BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to a meta-data registration scheme to be utilized in a data server device.

10 In the following description, a word "meta-data" stands for any data on a registered data (or data to be registered) which can be utilized in handling or managing the registered data.

15 DESCRIPTION OF THE BACKGROUND ART

In a system for providing information to users through information terminals and information processing by computers, a data server device has been used as a device for registering and storing data, from which a specified
20 data can be retrieved or data satisfying a desired condition can be searched and retrieved. The data server device can be implemented in a form of a file system or a database management system which is a part of an operating system of a computer, or a Web server, file server or
25 database server with respect to which data can be entered or retrieved through a network.

A Web server which is one variant of the data server device manages various data on a name space having tree-like hierarchical structure as shown in Fig. 1. In this
30 example, "/proj/doc/fig/image1.gif" and
"/proj/doc/fig/image2.gif" are image data in GIF format, "/proj/doc/spec.doc" is a document produced by a word processor (MS-WORD), "/proj/src/program.c" is a source code of a program written in the C language, and
35 "/sample/index.html" is a document file written in HTML.

Nodes that classify data such as nodes specified by `"/proj"` or `"/proj/doc/fig"` are generally referred to as directories. In each directory, arbitrary many data or directories can be included. A directory `"/"` that is at a top level in Fig. 1 will be referred to as a root directory.

Data managed by the Web server can be accessed by the HTTP protocol through a network. The HTTP protocol is disclosed in "Hypertext Transfer Protocol --HTTP/1.0" (RFC 1945) and "Hypertext Transfer Protocol --HTTP/1.1" (RFC 2068). When some client wishes to obtain data of `"/proj/doc/fig/image1.gif"`, for instance, this client sends a GET request having a header in a format of `"GET /proj/doc/fig/image1.gif HTTP/1.1"` to this Web server. Upon receiving this request, the Web server returns the requested data.

In order to register data on the Web server, a PUT request of the same HTTP protocol is used. When some client wishes to register a new image data in the GIF format under the name of `"/proj/doc/fig/image3.gif"`, for instance, this client sends a PUT request having a header in a format of `"PUT /proj/doc/fig/image3.gif HTTP/1.1"` to this Web server, while containing the image data to be registered in a body of this PUT request. Upon receiving this request, the Web server stores the received image data under the specified name.

In the HTTP protocol, a type of data to be exchanged by GET or PUT in terms of a MIME type. For instance, a type of data to be transferred is specified by a header in a form of `"Content-type: image/gif"`.

A UNIX file system which is another example of the data server device manages various data (called files in the case of the file system) on a name space having a tree-like hierarchical structure as shown in Fig. 2. In the example of Fig. 2, `"proc.c"` and `"sys.h"` are referred to as

files, while "src" and "include" are referred to as directories. At a time of accessing a file in the file system, a file name of a file to be accessed is specified by a file name having a hierarchical structure such as

5 "/src/kernel/proc.c".

It is well known that data managed by the data server device can be handled more conveniently by attaching meta-data to each data. There are various examples of the meta-data including creation date and location, a creator, an
10 access control information, an update log, a data source (information indicating where this data comes from), a channel, an EPG (electronic program guide), a thumb nail in the case of image data, an icon to be displayed by GUI, a position to be displayed on a display, an application that
15 created that data, an application for browsing that data, a MIME type of data, a size of data, and keywords to be used in the retrieval.

Meta-data is also referred to as property or attribute in some contexts.

20 When data are managed by attaching meta-data, it becomes possible not only access data by specifying its name, but also retrieve the data by specifying a value of its meta-data, or manage information necessary for applications in relation to the data.

25 A scheme for registering meta-data in the Web server is disclosed as a part of the specification called WebDAV in "HTTP Extensions for Distributed Authoring --WEBDAV" (Internet Draft: draft-ietf-webdav-protocol-10). In the WebDAV, it is possible to attach meta-data called property
30 to data managed by the Web server.

The Web server compatible with WebDAV manages data as shown in Fig. 3. It is basically the same as the Web server shown in Fig. 1, but unlike the usual Web server, it manages data and meta-data (property) in relation to each
35 other. The property is maintained by a pair of a name and a

value. In the example of Fig. 3, data specified by
"/doc/fig/imagel.gif" has three properties of "author",
"date" and "access". The "author" property has a creator of
the data as its value, which is "T. Sato" in this case. The
5 "date" property indicates the date on which the data was
created and the "access" property indicates an access right
information in this example.

In the WebDAV, a directly is referred to as a
collection. In Fig. 3, intermediate nodes of the tree
10 specified by "/" or "/doc/fig" are collections. In the
specification of the WebDAV, it is possible to attache a
meta-data to the collection as well. In the following
description, this collection will also be referred to as a
directory.

15 In the WebDAV, new request methods are added by
extending the HTTP protocol in order to access the
property. More specifically, a PROPFIND method is provided
in order to extract a value of the property, and a
PROPPATCH method is provided in order to set up or delete a
20 value of the property. By issuing a request using these
methods, it becomes possible to access the property. The
bodies of PROPFIND or PROPPATCH requests and replies are
required to be described using XML.

A scheme for retrieving data managed by attaching the
25 property according to the specification of the WebDAV is
called a DASL, which is disclosed in "DAV Searching &
Locating" (Internet Draft: draft-reddy-dasl-protocol-
04.txt). The DASL adds a SEARCH method for the retrieval by
expanding the HTTP protocol, such that when a SEARCH
30 request containing a retrieval condition described by XML
in its body is sent, a corresponding retrieval result
written in the same XML will be returned. In the retrieval
condition, a value of a property of a specific name can be
specified with respect to a certain property or a
35 combination of a plurality of properties.

An exemplary case of registering meta-data in the UNIX type file system includes a Be file system disclosed in Dominic Giampaolo: "Practical File System Design with the Be File System", Morgan Kaufmann Publishers, Inc., ISBN 1-55860-497-9. The Be file system manages files in the name space having a tree-like hierarchical structure similar to the UNIX, where meta-data called attribute can be attached to each file. The attribute is given by a pair of a name and a value, where the name is given by a character string, and the value is given by data such as a character string, integer, real number, binary number, etc.

Similarly as in the DASL, files can be retrieved using an attribute value or a combination of attribute values in the Be file system.

As described, in the data server device capable of managing meta-data, it is possible to manage various information as meta-data in relation to the data. In addition, it becomes possible to realize sophisticated accesses based on the retrieval using various information as keys, rather than a simple access using a name of data or file. Furthermore, the construction of an application program can be also made easier as the application manages information related to data as meta-data in relation to the data.

The data server device for managing meta-data in relation to data has various advantageous features as described above, but the full advantages of these features cannot be taken unless meta-data are actually attached to individual data. However, attaching meta-data to individual data requires enormously tedious tasks.

There are meta-data such as creation date and size of a file which can be attached automatically at a time of registering data. However, such meta-data are limited only to the generic meta-data that do not depend on data type and the like. If tasks to attach meta-data can be made

automatic somehow, even to some extent, for the other kinds of meta-data, it is possible to expect that the user will be relieved from tedious tasks.

Also, at a time of attaching meta-data, if different
5 names are used for the meta-data having the same meaning depending on persons who attach them or times at which they are attached, or if the meta-data are attached to the data of the same type under arbitrarily different names by different applications, it becomes impossible to realize
10 the effective retrieval later on. Consequently, there has been a demand for a way to attach meta-data systematically to some extent.

15 SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a scheme for systematically registering meta-data with respect to various types of individual data so as to
20 enable sophisticated retrieval or application program construction assistance utilizing the meta-data in the data server device.

According to one aspect of the present invention there is provided a meta-data registration method, comprising the
25 steps of: detecting a data type of registering data to be registered into a data server that registers and manages data and meta-data for data; selecting one procedure corresponding to the data type detected by the detecting step, from a plurality of procedures provided in
30 correspondence to respective data types and stored in advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type; generating the meta-data for the registering data by executing the program code of said one
35 procedure selected by the selecting step; and registering

the meta-data generated by the generating step in relation to the registering data into the data server.

According to another aspect of the present invention there is provided a meta-data registration device,
5 comprising: a detection unit configured to detect a data type of registering data to be registered into a data server that registers and manages data and meta-data for data; a selection unit configured to select one procedure corresponding to the data type detected by the detection
10 unit, from a plurality of procedures provided in correspondence to respective data types and stored in advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type; and an output unit configured to
15 output the meta-data for the registering data generated by executing the program code of said one procedure selected by the selection unit, to the data server.

According to another aspect of the present invention there is provided a data server device, comprising: a
20 request processing unit configured to receive and process a registration request for registering data to be registered into the data server device; a management unit configured to register the registering data according to the registration request and manage data and meta-data for
25 data; a detection unit configured to detect a data type of the registering data; a selection unit configured to select one procedure corresponding to the data type detected by the detection unit, from a plurality of procedures provided in correspondence to respective data types and stored in
30 advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type; a generation unit configured to generate the meta-data for the registering data by executing the program code of said one procedure selected
35 by the selection unit; and a registration unit configured

to register the meta-data generated by the generation unit into the management unit.

According to another aspect of the present invention there is provided a computer usable medium having computer
5 readable program codes embodied therein for causing a computer to function as a meta-data registration device, the computer readable program codes include: a first computer readable program code for causing said computer to detect a data type of registering data to be registered
10 into a data server that registers and manages data and meta-data for data; a second computer readable program code for causing said computer to select one procedure corresponding to the data type detected by the second computer readable program code, from a plurality of
15 procedures provided in correspondence to respective data types and stored in advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type; and a third computer readable program code for causing said computer to
20 output the meta-data for the registering data generated by executing the program code of said one procedure selected by the second computer readable program code, to the data server.

According to another aspect of the present invention
25 there is provided a computer usable medium having computer readable program codes embodied therein for causing a computer to function as a data server device, the computer readable program codes include: a first computer readable program code for causing said computer to receive and
30 process a registration request for registering data to be registered into the data server device; a second computer readable program code for causing said computer to register the registering data according to the registration request and manage data and meta-data for data; a third computer
35 readable program code for causing said computer to detect a

data type of the registering data; a fourth computer readable program code for causing said computer to select one procedure corresponding to the data type detected by the third computer readable program code, from a plurality of procedures provided in correspondence to respective data types and stored in advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type; a fifth computer readable program code for causing said computer to generate the meta-data for the registering data by executing the program code of said one procedure selected by the fourth computer readable program code; and a sixth computer readable program code for causing said computer to register the meta-data generated by the fifth computer readable program code into the second computer readable program code.

Other features and advantages of the present invention will become apparent from the following description taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram for explaining a conventional data management method used in a Web server.

Fig. 2 is a diagram for explaining a conventional data management method used in a UNIX file system.

Fig. 3 is a diagram for explaining a conventional data management method used according to WebDAV.

Fig. 4 is is a schematic block diagram showing a general configuration of a data server device.

Fig. 5 is a block diagram showing an exemplary configuration of a meta-data registration device according to one embodiment of the present invention.

Fig. 6 is a block diagram showing an exemplary

configuration of a data server device incorporating the meta-data registration device of Fig. 5.

Fig. 7 is a diagram showing an exemplary meta-data generation procedure table used in the meta-data

5 registration device of Fig. 5.

Fig. 8 is a flow chart for an exemplary meta-data registration processing by the meta-data registration device of Fig. 5.

Fig. 9 is a diagram showing an exemplary meta-data
10 generated by the meta-data registration processing of Fig. 8.

Fig. 10 is a diagram showing an exemplary XML document that can be handled by the meta-data registration device of Fig. 5.

15 Fig. 11 is a diagram showing an exemplary XML meta-data correspondence table that can be used in the meta-data registration device of Fig. 5.

Fig. 12 is a diagram showing an exemplary meta-data generated from a XML document data by the meta-data
20 registration device of Fig. 5.

Fig. 13 is a block diagram showing another exemplary configuration of a data server device incorporating a meta-data registration device according to one embodiment of the present invention.

25 Fig. 14 is a block diagram showing still another exemplary configuration of a data server device incorporating a meta-data registration device according to one embodiment of the present invention.

30

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to Fig. 4 to Fig. 14, the preferred embodiments of a meta-data registration scheme according to
35 the present invention will be described in detail.

In short, in the meta-data registration scheme of the present invention, a plurality of meta-data generation procedures (programs) for respective data types are stored in a computer (a meta-data registration device or a data server device) in advance, a meta-data registration procedure corresponding to a type of data to be registered into the data server device is selected from these stored meta-data generation procedures, and a meta-data is automatically generated using the selected meta-data generation procedure and registered in relation to the registering data.

Fig. 4 shows a general configuration of a data server device 100, which comprises a storage device 103 which is a device for actually storing data such as a magnetic disk device, a data management unit 102 for managing which data is stored in which region of the storage device 103, and an access request processing unit 101 which receives an access request from an access requesting source which is either an application program or a user (including a terminal device, a client, etc., on a network), commands reading/writing of data necessary for the requested access to the data management unit 102, and returns a request processing result to the access requesting source. Here, the request processing result is given by either a status information (response) indicating whether the data writing has succeeded or not in the case of a data writing request (PUT containing data, for example), or the read out data or a status information indicating that the data reading has failed in the case of a data reading request (GET indicating request, for example).

Fig. 5 shows an exemplary configuration of a meta-data registration device 200 according to one embodiment of the present invention, and Fig. 6 shows an exemplary configuration of a data server device 300 which incorporates the meta-data registration device 200 of Fig.

5 in addition to the general configuration of a data server device shown in Fig. 4. Note that Fig. 6 shows the meta-data server 200 only in a schematic configuration for the sake of simplicity but it should be understood that the meta-data server 200 actually has a detailed configuration as shown in Fig. 5.

When a request for registering data (PUT, for example) arrives at the data server device 300, the access request processing unit 301 of the data server device 300 gives this data to the data management unit 302 which carries out a processing for registering this data into the storage device 303, while also giving this data to a data type detection module 201 of the meta-data registration device 200.

15 The data type detection module 201 checks a data type of the data received from the access request processing unit 301.

A meta-data generation procedure selection module 202 of the meta-data registration device 200 is managing a correspondence between various data types and meta-data generation procedures (programs) for data of respective data types, in a form of a table, for example. The meta-data generation procedure selection module 202 receives the data type detected by the data type detection module 201, refers to the above described correspondence table, and selects the meta-data generation procedure corresponding to that data type.

A meta-data generation module 203 of the meta-data registration device 200 reads a program corresponding to the meta-data generation procedure selected by the meta-data generation procedure selection module 202, and generates a meta-data corresponding to the data given from the access request processing unit 301 by using this program.

35 A meta-data registration module 204 of the meta-data

registration device 200 registers the meta-data generated by the meta-data generation module 203 in relation to the corresponding data, by commanding the data management unit 302 accordingly.

5 Note that each unit or module described above can be realized in a form of hardware, software, or a combination of software and hardware. It is also possible to realize the data server device or the meta-data registration device of the present invention by installing a program for
10 realizing functions of each unit or module described above into a general purpose computer.

Now, an exemplary case of applying the present invention to a Web server compatible with WebDAV will be described. In this example, the data type is detected from
15 a MIME type or an extension of a data name of the data to be registered into the Web server.

The Web server of this example has a meta-data generation procedure table (data type/procedure correspondence table) as shown in Fig. 7. This meta-data
20 generation procedure table is a table indicating a correspondence among three pieces of information including a MIME type, an extension of data corresponding to that MIME type, and a meta-data generation procedure corresponding to that MIME type. For example, this table
25 indicates that data in the type of "image/jpeg" has the extension of either "jpeg" or "jpg", and its meta-data generation procedure is specified by "metajpeg". Here, the meta-data generation procedure name is actually given by either a pointer to a function or a name of a program
30 module to be executed.

Instead of providing such a meta-data generation procedure table, it is also possible to embed these correspondences into a meta-data registration program (a program for causing the general purpose computer to
35 virtually operate as a meta-data registration device having

a configuration as shown in Fig. 5) as conditional branchings.

When the Web server of this example receives a PUT request which is a data registration request, that data is
5 registered under the specified name, while the meta-data registration processing as shown in Fig. 8 is started.

In the meta-data registration processing of Fig. 8, whether the MIME type of the data to be registered (registering data) is specified in the header of the PUT
10 request or not is checked (step S1).

If the MIME type is specified, the meta-data generation procedure table is referred using a name of the specified MIME type as a key, and the meta-data generation procedure for the data in that MIME type is taken out (step
15 S2). If the MIME type is not specified, an extension portion of a name of the registering data is taken out, the meta-data generation procedure table is referred using that extension as a key, and the meta-data generation procedure for the data having that extension is taken out (step S3).
20 Here, when the MIME type of the registering data does not exist in the meta-data generation procedure table at the step S2, or when the extension of the registering data does not exist in the meta-data generation procedure table at the step S3, it indicates that the meta-data generation
25 procedure for this data is not provided (step S4 NO), so that the processing is terminated without attaching any meta-data to the registering data. On the other hand, when the corresponding meta-data generation procedure is found (step S4 YES), this procedure is executed to generate the
30 meta-data to be attached to the registering data (step S5).

The meta-data generated here is a collection of arbitrary numbers of pairs of meta-data name and value as shown in Fig. 9. In this example, the meta-data with a name "data" has a value "1998-07-12", the meta-data with a name
35 "author" has a value "Y. Suzuki", and the meta-data with a

name "program" has a value "photoshop4.0". After generating the meta-data in this manner, the meta-data is registered in relation to the registering data (step S6).

In this example, the processing is immediately
5 terminated at the step S4 when the meta-data generation procedure corresponding to the data type of the registering data is not found, but this part of the processing may be modified as follows. Namely, it is possible to generate a meta-data indicating that the meta-data generation
10 procedure for that data was not found at the step S5, and register this meta-data in relation to the registering data at the step S6. Alternatively, it is also possible to notify the user who is registering the data that the meta-data generation procedure corresponding to the registering
15 data cannot be found so that the automatic generation of meta-data is not carried out. By this notification, the user can recognize the fact that the registering data has no meta-data attached so that this registering data cannot be searched by the subsequent retrieval using the meta-
20 data. This is also effective in warning the user when a wrong data is registered or a wrong data registration method is used.

The above described example employs both a method for detecting the data type according to the MIME type
25 specified in the header of the PUT request and a method for detecting the data type according to an extension of a name of the registering data, with the higher priority given to the former method, but it is also possible to employ both methods with the higher priority given to the latter
30 method, or either one of these methods alone may be employed. Also, after the step S5 executes the meta-data generation procedure selected according to the MIME type at the step S2 once, if it is found out that the meta-data generation was not carried out appropriately, it is
35 possible to select another meta-data generation procedure

according to the extension once again, and execute this procedure to generate new meta-data once again.

Also, as a method for detecting the data type, it is possible to employ a method which checks first several
5 bytes of the data and judges the data type according to a value of the checked bytes, or a method which checks contents of data rather than the first several bytes and judges the data type according to the checked contents. For instance, in the case of data such as MPEG data, it is
10 possible to judge that this data is MPEG data by checking whether the data contents include a data sequence in a particular pattern or not.

Also, in the above described example, the meta-data generation procedure corresponding to the data type of the
15 registering data produces a list of meta-data to be attached in a predetermined format as shown in Fig. 9 first, and gives this list to the common processing step (step S6 of Fig. 8) which attaches the meta-data to the registering data, but it is also possible to implement the
20 present invention such that the meta-data is attached to the registering data directly by the meta-data generation procedure.

The meta-data generation procedures (programs) should be created for the respective data types in advance and
25 provided in a computer (the data server device or the meta-data registration device). For example, a document data of an application such as word processor contains within itself information on a document creation date, a document title, a document creator name, etc., in a format suitable
30 for that application. Consequently, the meta-data generation procedure can be created such that it extracts such an information contained in the document data itself as a meta-data in accordance with a format of the document data that is analyzed in advance. The similar meta-data
35 generation procedure can be created also for a data format

such as PDF that is widely used in distribution of electronic documents.

As disclosed in "Digital Still Camera Image File Format Standard (Exif) Version 2.1", JEIDA-49-1998, Japan Electronic Industry Development Association, data of a digital camera based on the widely used EXIF specification internally contains various information such as a model of camera used for image taking, date and time of image taking, a person who took the image, an image title, a shutter speed, an aperture, a lens focal length, latitude, longitude and altitude of an image taking location, user comments, etc. The EXIF specification based data has the MIME type of "image/jpeg" or "image/tiff", and the meta-data generation procedure corresponding to these data types is implemented such that it checks whether or not the EXIF information region is contained in a file of the JPEG or TIFF format, and extracts the EXIF information as the meta-data if the EXIF information region is contained. Even when the EXIF information region is not contained, it is still possible to extract some meta-data which is specific to the JPEG or TIFF format such as resolution.

As disclosed in "Recording -- Helical-scan digital video cassette recording system using 6,35 mm magnetic tape for consumer use (525-60, 625-50, 1125-60 and 1250-50 systems) --" (IEC 61834), data of a digital video based on the widely used DV specification internally contains various information such as a recording date and time, a category indicating a recorded content, language, a channel in the case of recording a broadcast program, latitude and longitude of a recording location, various settings and device data of a camera, etc., within the video stream. The DV specification based data is often recorded as a file in the AVI format or the QuickTime format that are widely used on PCs, and has the MIME type of "video/x-msvideo" or "video/quicktime". The meta-data generation procedure

corresponding to these data types is implemented such that it checks whether or not the DV data are contained in a file of the AVI or QuickTime format, and extracts the various DV data as the meta-data if the DV data are
5 contained.

It is also possible for the meta-data generation procedure to acquire some information not contained in the registering data from the external and attach it as the meta-data, in addition to simply extracting information
10 contained in the registering data as the meta-data, as indicated by a dashed line with arrowhead labelled "other information" that is entered into the meta-data generation module 203 in Fig. 5. For example, in the case of the DV specification based video data, it is possible to acquire
15 information regarding the program from an electronic program guide (EPG) according to information on the recording time and the broadcast channel contained within the data, and register information on the program title, the cast, etc., that is contained in the acquired
20 information as the meta-data. As for a method for extracting information from the electronic program guide, the electronic program guide information that is transmitted by utilizing a part of the broadcast signals can be stored in this data server device or a computer
25 connected to this data server device, and information on the pertinent program can be extracted from there. Alternatively, it is also possible to extract the electronic program guide information on the pertinent program from another server that is registered in advance,
30 via communication lines such as the Internet.

The types and the number of the meta-data to be generated by the meta-data generation procedure can be different for different data types. However, there are many meta-data which have the same meaning regardless of the
35 data types, such as date, location, title, and data

creator, for example. For these meta-data, it is preferable to create each meta-data generation procedure such that information extracted from data of different types will be registered as the meta-data of the same name. Namely, the
5 meta-data generation procedure corresponding to the document data and the meta-data generation procedure corresponding to the JPEG data should preferably be created such that both the creation date extracted from the document data and the imaging date extracted from the EXIF
10 information of the JPEG data will be registered under the meta-data name of "date".

By such an implementation, it becomes possible to carry out meaningful retrieval even when data of different types coexist. For example, when the digital camera data in
15 the EXIF format, the digital video data in the DV format, and the schedule data, all of which were created on the same date, are coexisting, it is possible to select the schedule of that date and the camera images and the video taken on that date by the retrieval specifying that date.
20 Besides that, it also becomes possible to carry out the retrieval for searching data regarding a certain location regardless of whether it is camera image or video.

In the case where the data type of the registering data is the XML document, it is also possible to change a
25 manner of generating the meta-data according to a content of that XML document.

As shown in Fig. 10, the XML document has a tree structure with hierarchical tags called elements. Namely, what is enclosed between <book> and </book> is an element
30 with an element name "book", and this element contains plural elements such as an element enclosed between <title> and </title>. To the XML document, it is possible to associate a document definition information called DTD. In the example of Fig. 10, the DTD with a name "book.dtd" is
35 associated. In the DTD, what elements appears in what order

or hierarchy in that document is defined. In the case of "book.dtd", it is defined that elements "title", "author", "publisher", etc., are arranged within a top level element "book". The XML document does not always have the DTD, and
5 there can be XML documents without DTD. In such a case, there is a total freedom as to what elements are to be used in what order or hierarchy. As a method for defining the structure of the XML document, there are various available methods other than DTD, such as DDML, DCD, SOX, XML-DATA,
10 and RDF, and any of these methods can be handled similarly in the meta-data registration device of this embodiment.

In the Web server of this example, when the data registration request using the PUT request is received, the meta-data generation procedure selection module 202 refers
15 to the data type/procedure correspondence table and judges that it is the XML document if the specified MIME type is "text/xml" or the extension is "xml". Then, the meta-data generation module 203 selectively executes the meta-data generation procedure corresponding to the data type of the
20 XML document, where this meta-data generation procedure for the XML document refers to an XML meta-data correspondence table (not shown) to check whether there exists an element specified by the XML meta-data correspondence table in the registering XML document or not, and extracts information
25 contained in that element if that element exists.

The XML meta-data correspondence table can be given by a table comprising three data items including a DTD name, an element name and a corresponding meta-data name, as shown in Fig. 11, for example. In the case of the XML
30 document shown in Fig. 10, the DTD name is "book.dtd", and when the XML meta-data correspondence table of Fig. 11 is referred using this DTD name, it is indicated therein that information of the element under the name "title" should be set as a value of the meta-data under the name "title",
35 information of the element under the name "author" should

be set as a value of the meta-data under the name "author", and information of the element under the name "keywords" should be set as a value of the meta-data under the name "keyword". As a result, the meta-data as shown in Fig. 12
5 can be generated.

The types and/or the number of meta-data generated by the meta-data generation procedure for the XML document can be different for different XML documents to be registered. However, for the meta-data which have the same meaning but
10 different element names in different XML documents, such as date, location, title, and data creator, for example, it is preferable to create the XML meta-data correspondence table such that information extracted from elements with
different element names will be registered as the meta-data
15 of the same name. Namely, the example of Fig. 11 is made such that both the "creator" information extracted from "photo.dtd" and the "author" information extracted from "book.dtd" will be registered under the meta-data name of "author". By this implementation, it is possible to carry
20 out the meaningful retrieval even when XML documents with different DTDs are coexisting.

In the above described example, the information to be extracted as the meta-data is specified by the DTD name and the element name in the XML meta-data correspondence table,
25 but it is also possible to specify the information to be extracted as the meta-data by the element name alone. In such a case, whenever the element with the specified name exists, the corresponding meta-data is extracted regardless of what XML document it is. This applies similarly for
30 those XML documents without DTD.

It is also possible to specify an element from which the information should be extracted as the meta-data by a pair of a name space name and an element name. Here, the name space name is assigned in order to distinguish cases
35 in which the same element name has different meanings

depending on the DTDs in which it is defined.

In addition, instead of registering the information of the element specified in the XML meta-data correspondence table directly as a value of the meta-data, it is also

5 possible to register the meta-data after removing unnecessary tags (such as tags of other elements that are contained in the specified element) from that information, summarizing the content of that information, or converting date or the like into some standard format,

10 There are also cases where "application/xml" is used as the MIME type of the XML document, but these cases can be handled similarly as described above.

The other structured documents such as HTML documents and SGML documents can also be handled similarly as the XML
15 documents.

A timing for generating and registering the meta-data using the meta-data registration device of this embodiment can be a timing for receiving and processing the data registration request at the data server device such as Web
20 server, database server or file server, or the meta-data of the newly registered data can be generated and registered asynchronously after the data registration.

The meta-data registration device of this embodiment is equally applicable to a file system capable of managing
25 the meta-data. In the case of the Web server, all the data will be registered collectively in response to the PUT request, but in the case of the file system, it is preferable to handle cases where a part of the already existing data is to be updated. For this reason, it is
30 preferable to carry out the meta-data generation and registration processing similar to that in the case of the Web server, at a time of closing files. It is also possible to record which file is updated at a time of closing files, and carry out the meta-data generation and registration
35 processing asynchronously later on by searching out the

updated files.

In the meta-data registration device of this embodiment, a suitable meta-data generation procedure is selected according to the data type of the registering data. As a method for judging the data type, apart from those already described above, it is also possible to employ a method which handles data entered from a specific input device as a prescribed type. For example, it is possible to assume that video data entered from the digital video device via the IEEE 1394 network are always in the DV format, and carry out the procedure for extracting the meta-data from data of the DV format type with respect to such video data.

In the case of a system which can attach the meta-data not only to data but also to a directory, it is preferable to provide a function for updating the meta-data of a directory into which the data is to be registered, at a time of the data registration, in addition to the generation of the meta-data for that data. Namely, data or child directories contained in that directory may be changed by the new registration or deletion of data. For this reason, in addition to attaching the meta-data at a time of registration as in the case of the ordinary data, the need to change the meta-data of the directory is checked whenever data or child directory contained in the directory is added/deleted, and the meta-data of the directory is updated whenever necessary.

The information to be updated as the meta-data of that directory at a time of addition/deletion of data or child directory within that directory includes a range of dates of data and meta-data, a range of locations of data and meta-data, and keywords for retrieval of data and meta-data. Namely, the meta-data of the directory contains information indicating common features of the meta-data of data or child directories within that directory.

The meta-data generation procedure required in attaching the meta-data to the directory is different from the meta-data generation procedure for each data type in that it has to be managed in correspondence to the
5 directory. As a method for maintaining this correspondence, there is a method which manages a pair of the directory name and the meta-data generation procedure for that directory in a correspondence table. As another method, there is also a method in which information on the meta-
10 data generation procedure for that directory is included as a data under a specific name that is contained within that directory. As still another method, there is also a method in which a value of the meta-data with a specific name of that directory indicates information on the meta-data
15 generation procedure of that directory or information for obtaining the meta-data generation procedure of that directory. Any of these methods may be used singly or in combination. it is also possible to check whether each method among a plurality of methods is applicable or not in
20 a prescribed order, and use a method that is checked to be applicable first.

An exemplary operation in the case of employing the first method for maintaining the correspondence described above is as follows. When the addition/deletion of data or
25 child directory occurs, the access request processing unit 301 or the data management unit 302 notifies this fact to the meta-data generation procedure selection module 202. Then, the meta-data generation procedure selection module 202 selects the meta-data generation procedure (program)
30 corresponding to the directory that contains the data or child directory to be added/deleted, by referring to a directory name/procedure correspondence table (not shown). The meta-data generation module 203 then reads and executes the selected procedure. For example, the meta-data of that
35 directory is read out from the storage device 303 through

the data management unit 302 and its content is checked, while the meta-data of the data or child directories contained in that directory (at least one of the data or child directory to be added/deleted and the others) are read out and their contents are checked, and in the case where the common features of the meta-data of the data or child directories contained in that directory will be changed by that addition/deletion, new meta-data for that directory is generated. Then, the meta-data registration module 204 rewrites the meta-data of that directory into the newly generated content.

Besides that, it is also possible to change a manner of generating the meta-data at a time of generating the meta-data of data to be registered by the meta-data generation procedure, by referring to the meta-data of the directory into which this data is to be registered, as indicated by a dashed line with arrowhead labelled "other information" that is entered into the meta-data generation module 203 in Fig. 5.

For example, whether the directory has the meta-data of the same name as the meta-data generated from the registering data or not is checked. If it has, a value of the meta-data of the registering data and a value of the meta-data of the directory are compared, and if they differ (they do not coincide or a value of the meta-data of the registering data is not within a range of a value of the meta-data of the directory), this fact is notified to the data registration requesting source. By this implementation, it is possible to prevent the erroneous registration of data with different dates into a directory in which only data of the same date should be entered, for example.

As another example, whether the directory has the meta-data of the same name as the meta-data generated from the registering data or not is checked. If it has, a value

of the meta-data of the registering data and a value of the meta-data of the directory are compared, and if they coincide, this meta-data is not generated for the registering data. In this way, when there is some data
5 which does not have the meta-data of interest, a value of the meta-data with the same name of the directory in which that data exists can be used as a default value (or when data having a certain meta-data value is to be searched but there is some data which does not have that meta-data, the
10 search can be carried out by regarding a value of that meta-data of the directory in which that data exists as a value of that meta-data of that data). As a result, in the case of the directory into which a plurality of data with the same date are contained, for example, the meta-data for
15 the date is attached only to the directory and not to individual data, so that it is possible to save the storage capacity. Also, in this method, when most of the data in the directory use the default date as the meta-data, it is still possible to allow the entry of data having an
20 exceptional value for the meta-data for the date into that directory (in which case, at a time of the search, the default date is used for those data which have no meta-data for the date and the date indicated by the meta-data for the date is used for those data which have the meta-data
25 for the date).

Also, as other embodiments of the present invention, it is possible to implement a part of the functions of the meta-data registration device separately, in the external of the data server, rather than incorporating the entire
30 meta-data registration device as a part of the data server device such as Web server or file system.

Fig. 13 shows a configuration in which all the functions related to the meta-data generation among the functions of the meta-data registration device are
35 implemented separately in the external of the data server

device. In this configuration, a function (201) for detecting the data type of the registering data, a function (202) for selecting the meta-data generation procedure corresponding to that data type, a function (203) for
5 generating the meta-data using the selected procedure, and a function for returning the obtained result to the data server device 400 in a format shown in Fig. 9, for example, are provided in a meta-data extraction unit 402 which is independent from the data server device 400. A meta-data
10 generation calling unit 401 provided in the data server device 400 gives the data to the meta-data extraction unit 402 and receives the meta-data generated as a result, and a meta-data registration unit 403 provided in the data server device 400 registers the received meta-data into the
15 storage device 103 through the data management unit 102. Communications between the data server device 400 and the meta-data extraction unit 402 are realized by inter-process communications or communications via network.

Fig. 14 shows a configuration in which the function
20 related to the meta-data generation with respect to a specific data type among the functions of the meta-data registration device are implemented separately in the external of the data server device. In this configuration, a function (503) for generating the meta-data for the data
25 in the specific data type given from the data server device 500 and returning the obtained result to the data server 500 in a format shown in Fig. 9, for example, is provided in a meta-data extraction unit 502 which is independent from the data server device 500. A meta-data generation
30 calling module 501 provided in the data server device 500 gives the data to the meta-data extraction unit 502 when the generation procedure selected by the meta-data generation procedure selection module 202 should be executed outside the data server device 500, and receives
35 the meta-data generated as a result. There may be a

plurality of meta-data extraction units 502 in
correspondence to a plurality of data types. In such a
case, the meta-data generation calling module 501 gives the
data to one meta-data extraction unit 502 that has the
5 procedure specified from the meta-data generation procedure
selection module 202 among a plurality of meta-data
extraction units 502.

In the case of adopting a configuration as shown in
Fig. 14, information necessary in calling the external
10 function for extracting the meta-data for the data type is
recorded in an entry of the meta-data generation procedure
for that data type in the meta-data generation procedure
table to be referred by the meta-data generation procedure
selection module 202. For example, in the case where the
15 data server device 500 and the meta-data extraction unit
502 communicate using SOCKET which is the inter-process
communication function of the UNIX, an address of SOCKET is
recorded. It is also possible to use both the configuration
of Fig. 14 and the configuration of Fig. 6 in combination.

20 As described, according to the present invention, it
is possible to attach the meta-data to the registering data
automatically, so that it is possible to relieve the user
from the tedious task of attaching the meta-data to each
individual registering data, and the necessary meta-data
25 can be attached without failure.

In addition, the meta-data under the same names can
always be attached to data of the same data type, and even
for data of the different data types, the same name can be
used for the meta-data which have the same meaning at a
30 level of the meta-data generation procedure, so that it is
possible to carry out the retrieval specifying the same
meta-data name with respect to a wide range of data.

It is to be noted that the above described embodiments
35 according to the present invention may be conveniently

implemented using a conventional general purpose digital computer programmed according to the teachings of the present specification, as will be apparent to those skilled in the computer art. Appropriate software coding can
5 readily be prepared by skilled programmers based on the teachings of the present disclosure, as will be apparent to those skilled in the software art.

In particular, the meta-data registration device of the data server device of the above described embodiments
10 can be conveniently implemented in a form of a software package.

Such a software package can be a computer program product which employs a storage medium including stored computer code which is used to program a computer to
15 perform the disclosed function and process of the present invention. The storage medium may include, but is not limited to, any type of conventional floppy disks, optical disks, CD-ROMs, magneto-optical disks, ROMs, RAMs, EPROMs, EEPROMs, magnetic or optical cards, or any other suitable
20 media for storing electronic instructions.

It is also to be noted that, besides those already mentioned above, many modifications and variations of the above embodiments may be made without departing from the novel and advantageous features of the present invention.
25 Accordingly, all such modifications and variations are intended to be included within the scope of the appended claims.

30

35

WHAT IS CLAIMED IS:

1. A meta-data registration method, comprising the steps of:

5 detecting a data type of registering data to be registered into a data server that registers and manages data and meta-data for data;

selecting one procedure corresponding to the data type detected by the detecting step, from a plurality of
10 procedures provided in correspondence to respective data types and stored in advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type;

generating the meta-data for the registering data by
15 executing the program code of said one procedure selected by the selecting step; and

registering the meta-data generated by the generating step in relation to the registering data into the data server.

20

2. The method of claim 1, wherein each procedure also contains information for specifying types of the meta-data to be generated according to the corresponding data type, and each procedure is designed to generate names and values
25 of the meta-data in types specified by said information.

3. The method of claim 2, wherein the plurality of procedures are designed such that those meta-data that are generated by different procedures but that have an
30 identical meaning to an application or a user will be given an identical name.

4. The method of claim 2, wherein a value of the meta-data is generated by extracting at least one of information
35 contained in the registering data and separately stored

information that is acquired according to the information contained in the registering data.

5. The method of claim 1, wherein the detecting step
5 detects the data type by checking at least one of
information contained in a registration request for the
registering data issued to the data server, information
contained in the registering data, and a type of a device
from which the registering data are entered.

10

6. The method of claim 1, further comprising the steps
of:

carrying out at least one of a processing for
generating one meta-data indicating non-existence of a
15 corresponding procedure and registering said one meta-data
in relation to the registering data, and a processing for
notifying the non-existence of the corresponding procedure
to an application or a user, when the corresponding
procedure of the data type detected by the detecting step
20 does not exist among the plurality of procedures stored in
advance.

7. The method of claim 1, wherein the plurality of
procedures includes a first procedure corresponding to
25 structured documents, which contains a structure
information indicating a structure as a type of the meta-
data to be generated, extracts a portion specified by the
structure information from a document represented by the
registering data, and generates the meta-data given by an
30 extracted portion in correspondence to a name specified by
the first procedure.

8. The method of claim 7, wherein the first procedure
defines the structure information for each definition
35 information that defines a document structure, and is

designed such that those meta-data that are generated from different documents using different definition information but that have an identical meaning to an application or a user will be given an identical name.

5

9. The method of claim 1, wherein the data server manages data using directories, and the method further comprises the steps of:

10 additionally selecting another procedure corresponding to one directory for containing data to be added or deleted, from another plurality of procedures provided in correspondence to respective directories and stored in advance, each of the another plurality of procedures having another program code for generating directory meta-data
15 that can be utilized in managing a corresponding directory, when a new data is to be added to or an existing data is to be deleted from the data server;

20 additionally generating new directory meta-data by executing the another program code of the another procedure selected by the additionally selecting step; and

updating the directory meta-data already registered in relation to said one directory to the new directory meta-data generated by the additionally generating step.

25 10. The method of claim 1, wherein the data server manages data using directories, and the method further comprises the steps of:

30 notifying an application or a user that issued a registration request for the registering data to the data server when the meta-data generated for the registering data does not match with the directory meta-data that is used in managing one directory for containing the registering data.

35 11. The method of claim 1, wherein the data server manages

data using directories, and the method further comprises the steps of:

registering the meta-data generated for the registering data in relation to the registering data when
5 the meta-data generated for the registering data does not match with directory meta-data that is used in managing one directory for containing the registering data, and not registering the meta-data generated for the registering data otherwise.

10

12. The method of claim 11, wherein further comprising the step of:

managing the registering data at the data server by using the meta-data registered in relation to the
15 registering data when the meta-data registered in relation to the registering data exists, or by using the meta-data for said one directory otherwise.

13. A meta-data registration device, comprising:

20 a detection unit configured to detect a data type of registering data to be registered into a data server that registers and manages data and meta-data for data;

a selection unit configured to select one procedure corresponding to the data type detected by the detection
25 unit, from a plurality of procedures provided in correspondence to respective data types and stored in advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type; and

30 an output unit configured to output the meta-data for the registering data generated by executing the program code of said one procedure selected by the selection unit, to the data server.

35 14. The meta-data registration device of claim 13, further

comprising:

a generation unit configured to generate the meta-data for the registering data by executing the program code of said one procedure selected by the selection unit, wherein
5 the output unit registers the meta-data generated by the generation unit in relation to the registering data into the data server.

15. The meta-data registration device of claim 13, further
10 comprising:

an acquisition unit configured to acquire the meta-data for the registering data generated by executing the program code of said one procedure selected by the selection unit, wherein the output unit registers the meta-
15 data for the registering data acquired by the acquisition unit in relation to the registering data into the data server.

16. A data server device, comprising:

20 a request processing unit configured to receive and process a registration request for registering data to be registered into the data server device;

a management unit configured to register the registering data according to the registration request and
25 manage data and meta-data for data;

a detection unit configured to detect a data type of the registering data;

a selection unit configured to select one procedure corresponding to the data type detected by the detection
30 unit, from a plurality of procedures provided in correspondence to respective data types and stored in advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type;

35 a generation unit configured to generate the meta-data

for the registering data by executing the program code of said one procedure selected by the selection unit; and

5 a registration unit configured to register the meta-data generated by the generation unit into the management unit.

17. A computer usable medium having computer readable program codes embodied therein for causing a computer to function as a meta-data registration device, the computer
10 readable program codes include:

a first computer readable program code for causing said computer to detect a data type of registering data to be registered into a data server that registers and manages data and meta-data for data;

15 a second computer readable program code for causing said computer to select one procedure corresponding to the data type detected by the second computer readable program code, from a plurality of procedures provided in correspondence to respective data types and stored in
20 advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type; and

a third computer readable program code for causing said computer to output the meta-data for the registering
25 data generated by executing the program code of said one procedure selected by the second computer readable program code, to the data server.

18. The computer usable medium of claim 17, wherein the
30 computer readable program codes further include:

a fourth computer readable program code for causing said computer to generate the meta-data for the registering data by executing the program code of said one procedure selected by the second computer readable program code,
35 wherein the third computer readable program code registers

the meta-data generated by the fourth computer readable program code in relation to the registering data into the data server.

5 19. The computer usable medium of claim 17, wherein the computer readable program codes further include:

10 a fourth computer readable program code for causing said computer to acquire the meta-data for the registering data generated by executing the program code of said one procedure selected by the selection unit, wherein the third computer readable program code registers the meta-data for the registering data acquired by the fourth computer readable program code in relation to the registering data into the data server.

15

20. A computer usable medium having computer readable program codes embodied therein for causing a computer to function as a data server device, the computer readable program codes include:

20 a first computer readable program code for causing said computer to receive and process a registration request for registering data to be registered into the data server device;

25 a second computer readable program code for causing said computer to register the registering data according to the registration request and manage data and meta-data for data;

30 a third computer readable program code for causing said computer to detect a data type of the registering data;

a fourth computer readable program code for causing said computer to select one procedure corresponding to the data type detected by the third computer readable program code, from a plurality of procedures provided in
35 correspondence to respective data types and stored in

advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type;

5 a fifth computer readable program code for causing said computer to generate the meta-data for the registering data by executing the program code of said one procedure selected by the fourth computer readable program code; and

10 a sixth computer readable program code for causing said computer to register the meta-data generated by the fifth computer readable program code into the second computer readable program code.

15

20

25

30

35

ABSTRACT OF THE DISCLOSURE

A scheme for systematically registering meta-data with respect to various types of individual data so as to enable sophisticated retrieval or application program construction assistance utilizing the meta-data in a data server is disclosed. A data type of registering data to be registered into a data server that registers and manages data and meta-data for data, and one procedure corresponding to the detected data type is selected from a plurality of procedures provided in correspondence to respective data types and stored in advance, each procedure having a program code for generating the meta-data for data according to a corresponding data type. Then, the meta-data for the registering data are generated by executing the program code of the selected procedure, and the generated meta-data are registered in relation to the registering data.

20

25

30

35

1/11

FIG. 1
PRIOR ART



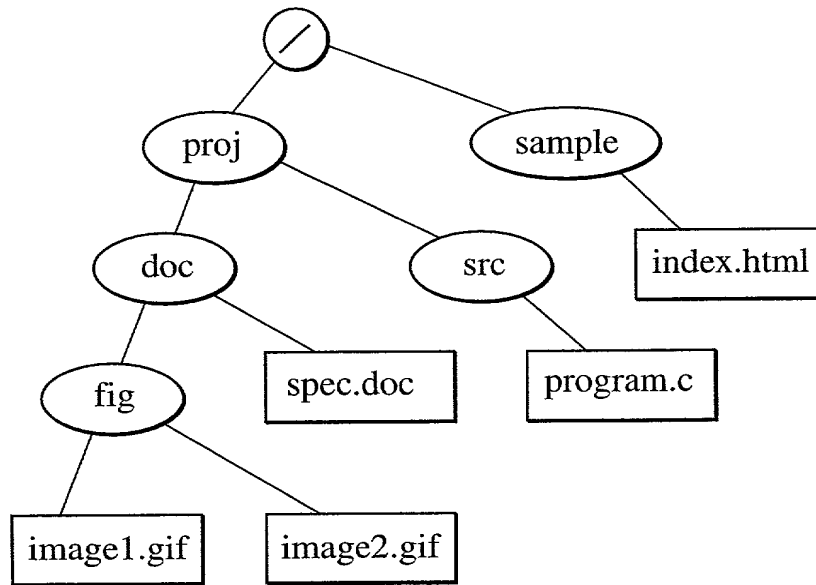


FIG. 2
PRIOR ART

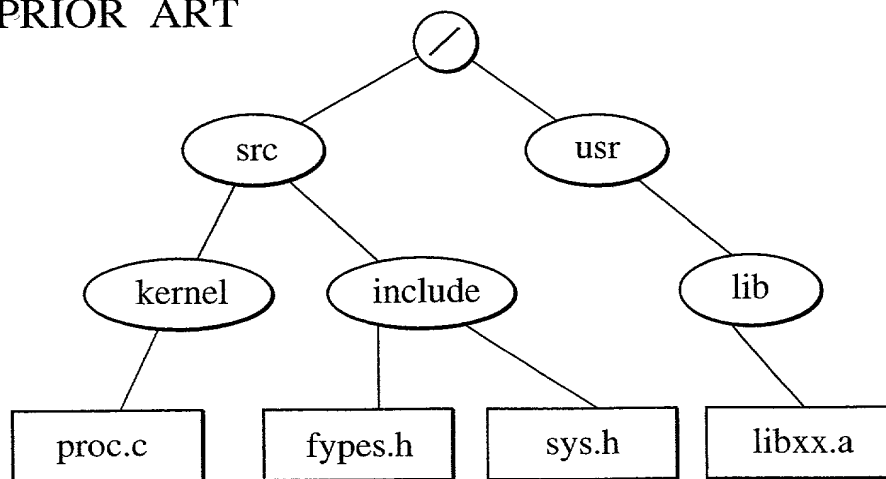


2/11

FIG. 3
PRIOR ART

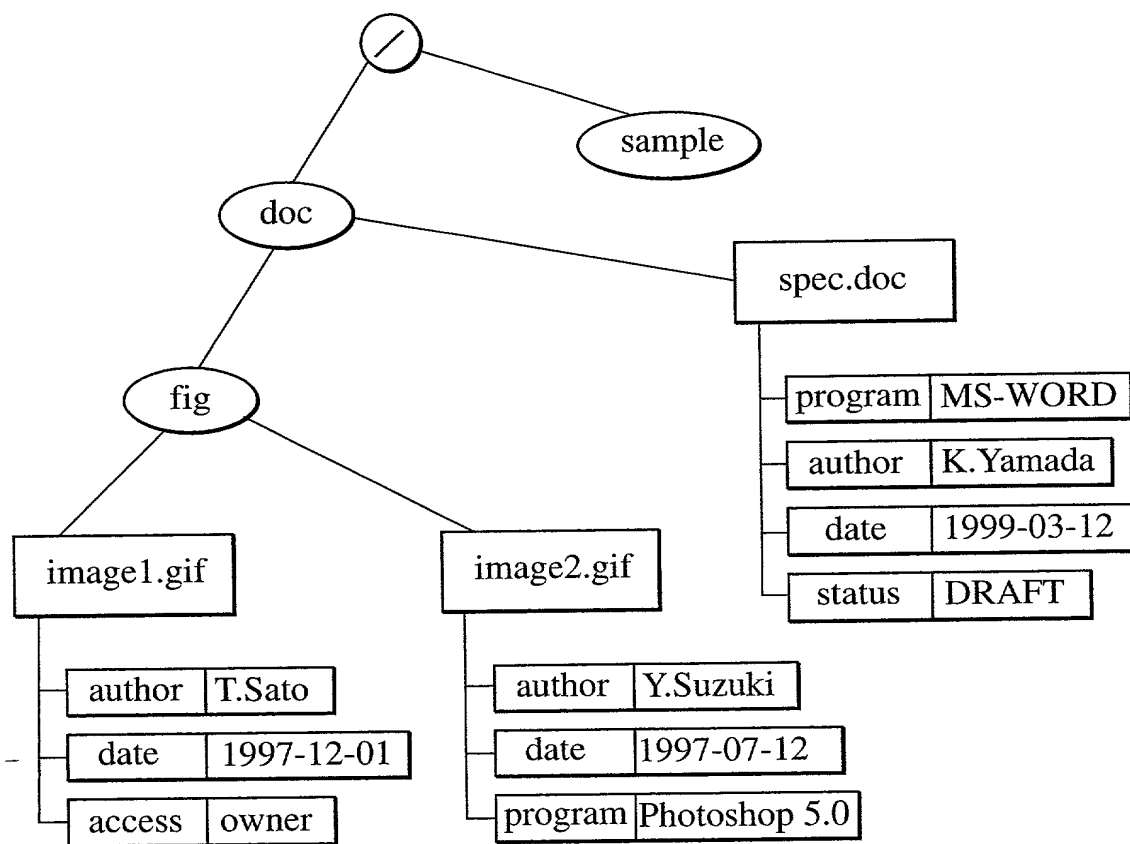


3/11

FIG. 4

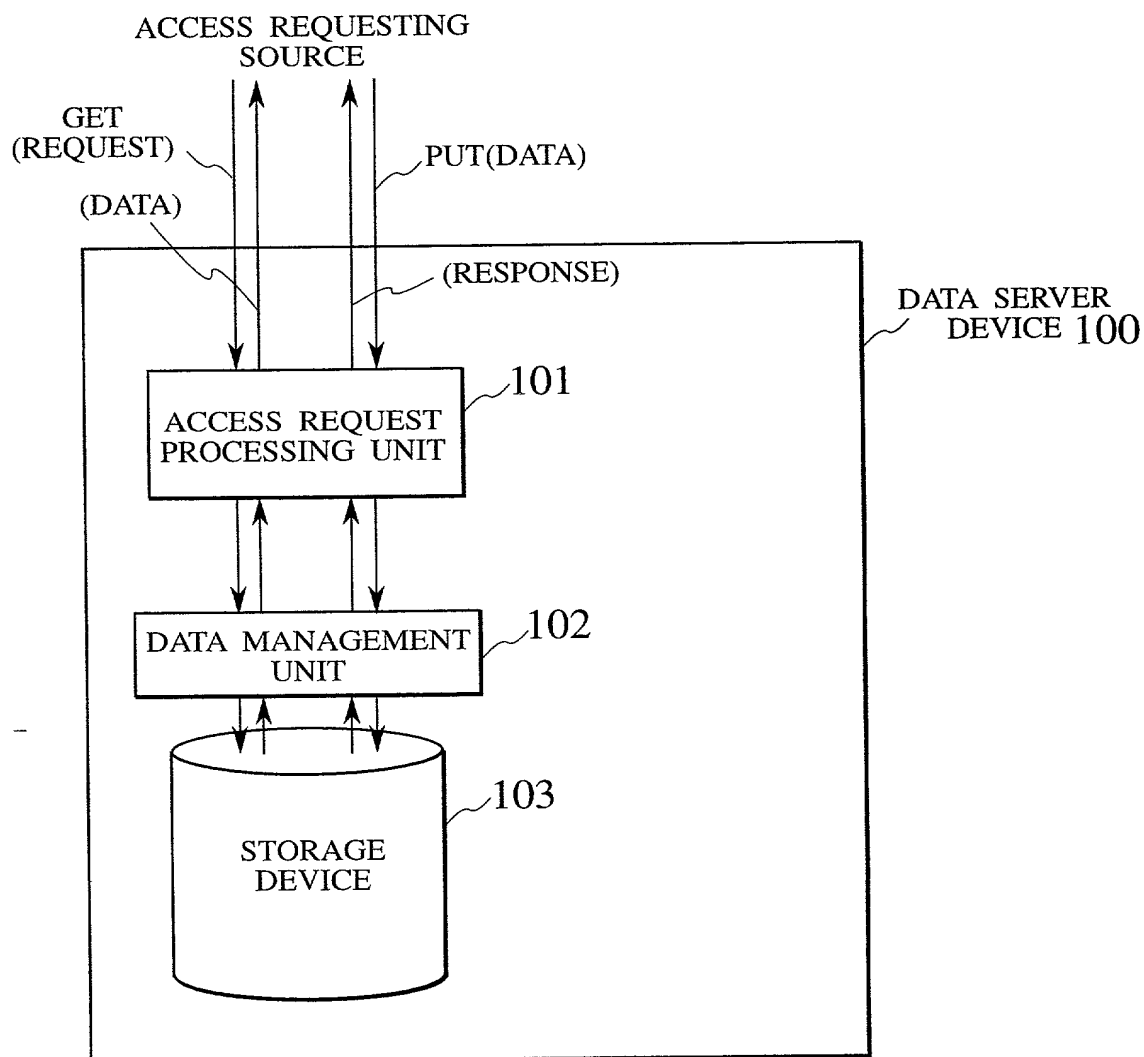


4/11

FIG. 5

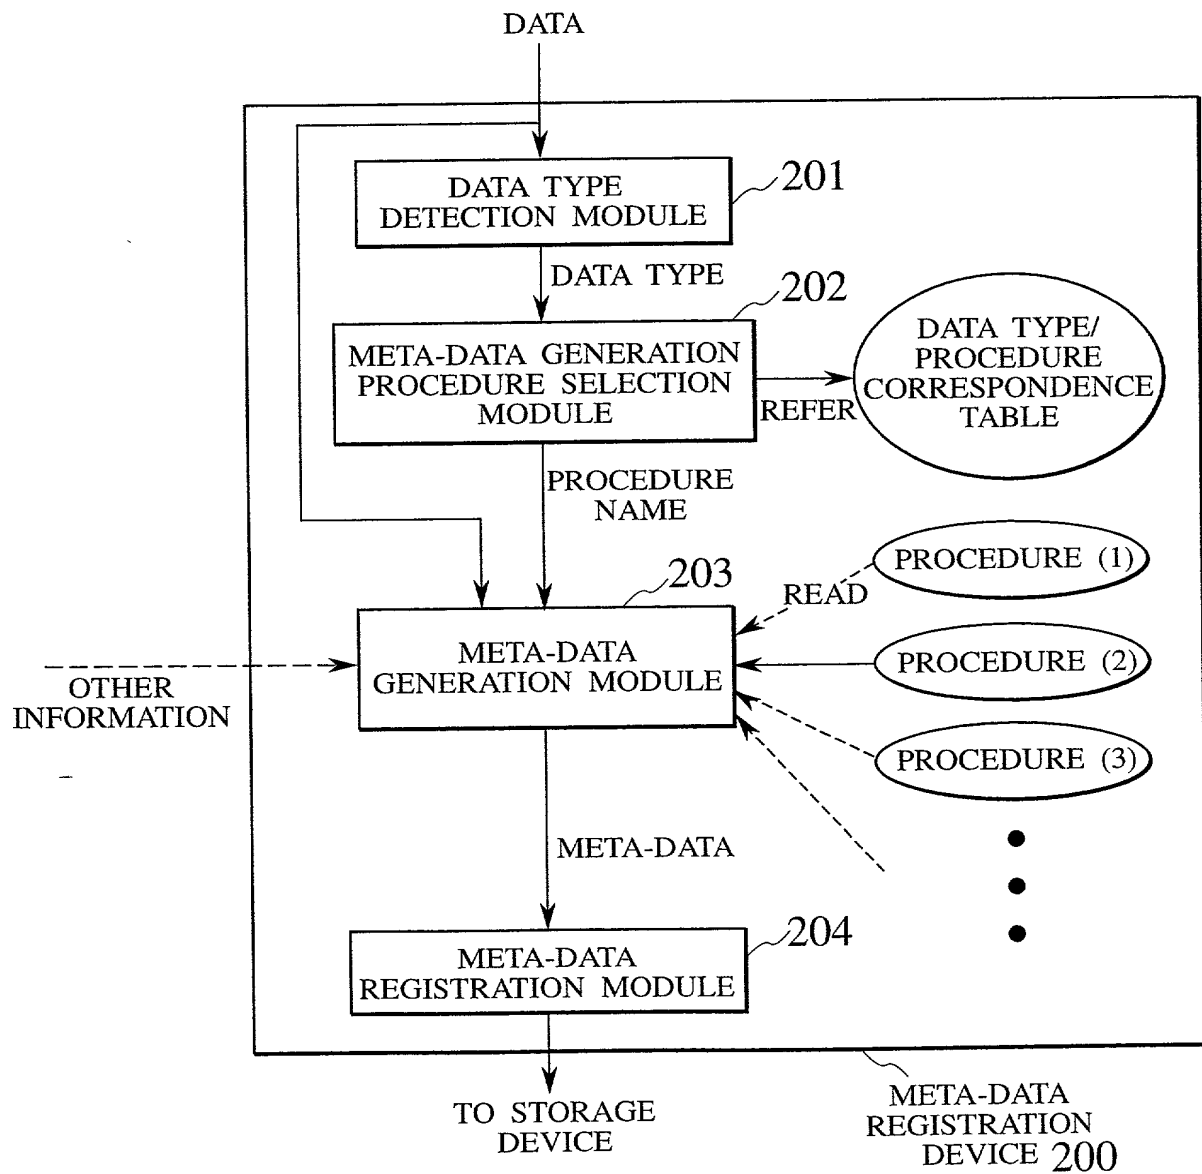

5/11

FIG. 6

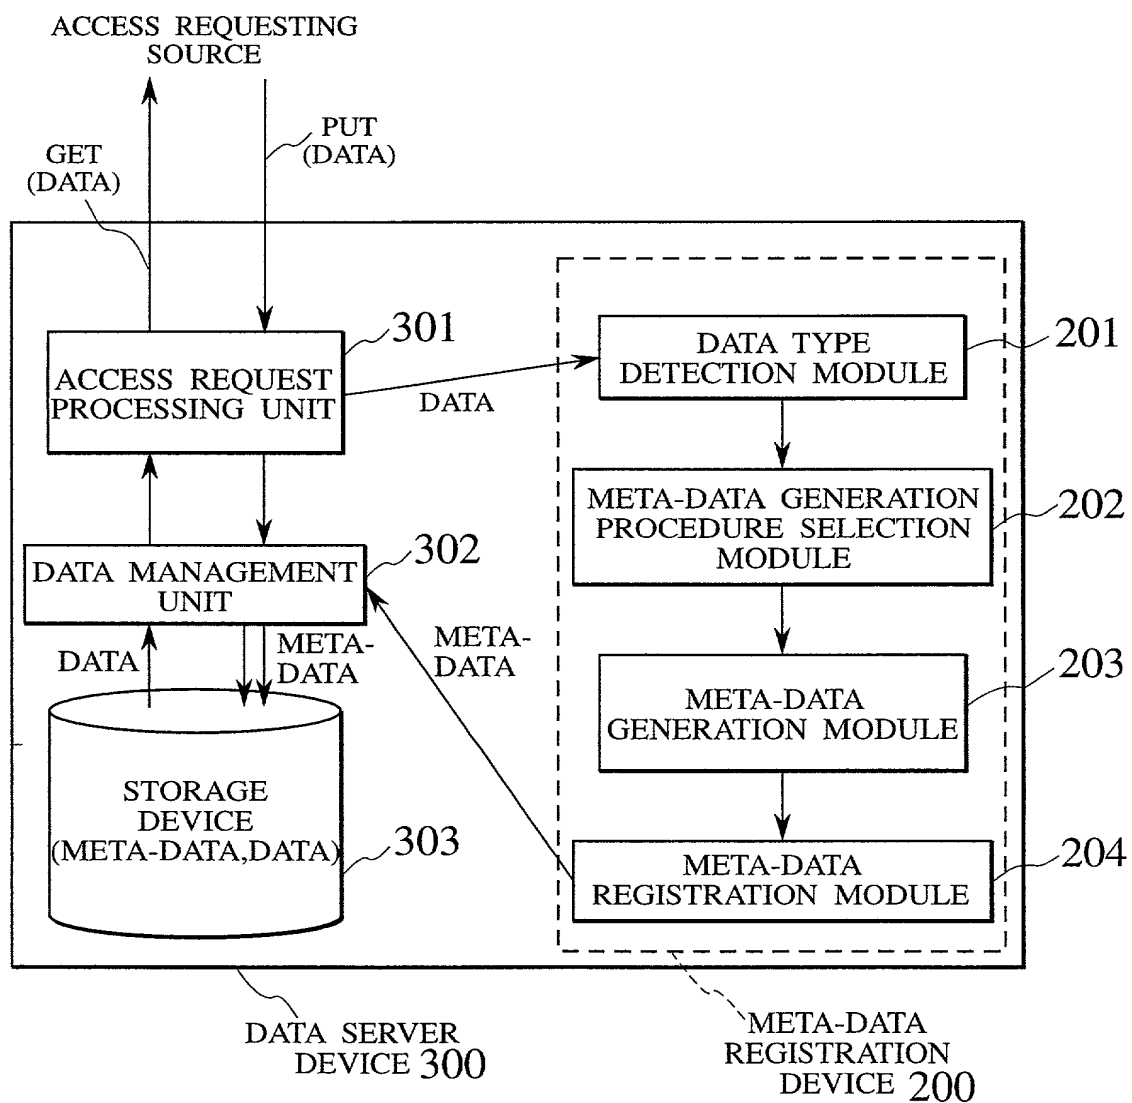


6/11

FIG. 7

MIME TYPE	EXTENSION	META-DATA GENERATION PROCEDURE
application/msword	doc	metadoc
application/pdf	pdf	metapdf
image/jpeg	jpeg,jpg	metajpeg
image/tiff	tiff,tif	metatiff
video/x-msvideo	avi	metaavi
video/quicktime	qt,mov	metaqt
text/xml	xml	metaxml

7/11

FIG. 8

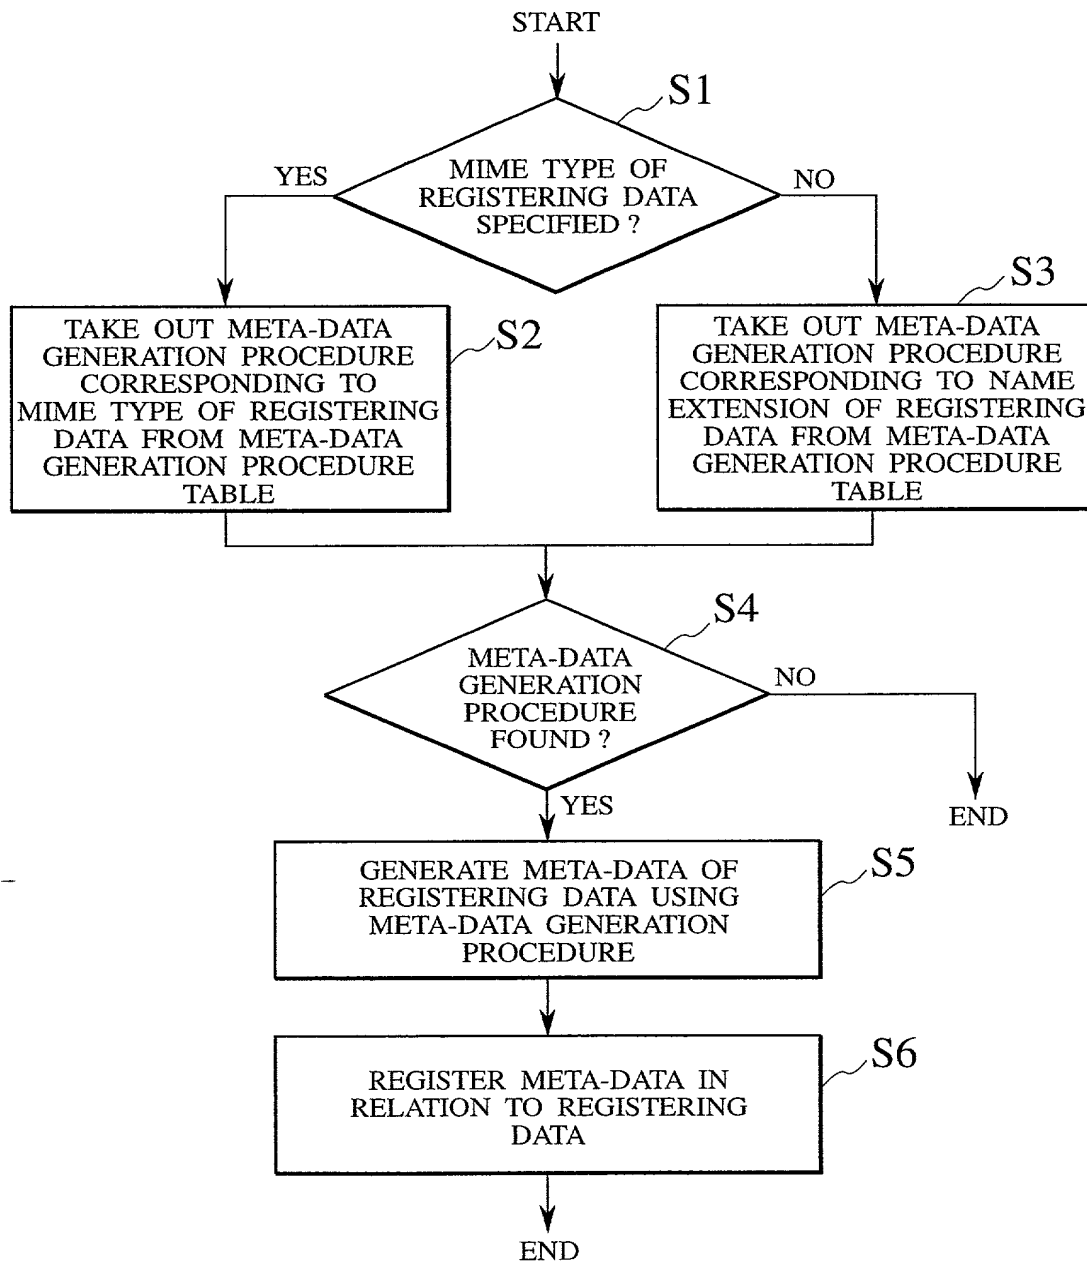

8/11

FIG. 9

date	1998-07-12
author	Y.Suzuki
program	photoshop 4.0

FIG. 10

```
<?xml version="1.0">
<!DOCTYPE book SYSTEM "book.dtd">
<book>
  <title>Practical File System Design with the Be File System</title>
  <author>Domanic Giampaolo</author>
  <publisher>Morgan Kaufmann Publishers, Inc.</publisher>
  <isbn>1558604979</isbn>
  <date>November 1998</date>
  <price unit="USD">34.95</price>
  <page>237</page>
  <dimension unit="inch">0.62 x 8.97 x 7.04</dimension>
  <contents>
    <chapter num="1">Introduction to the BeOS and BFS</chapter>
    <chapter num="2">What Is a File System</chapter>
    <chapter num="3">Other File System</chapter>
    <chapter num="4">The Data Structures of BFS</chapter>
    - <chapter num="5">Attributes, Indexing, and Queries</chapter>
    <chapter num="6">Allocation Policies</chapter>
    <chapter num="7">Journaling</chapter>
    <chapter num="8">The Disk Block Cache</chapter>
    <chapter num="9">File System Performance</chapter>
    <chapter num="10">The Vnode Layer</chapter>
    <chapter num="11">User-Level API</chapter>
    <chapter num="12">Testing</chapter>
    <chapter num="Appendix">A File System Construction Kit</chapter>
    <chapter>Bibliography</chapter>
    <chapter>Index</chapter>
  </contents>
  <keywords>BeOS. File System, Journaling, Index</keywords>
</book>
```

9/11

FIG. 11


DTD NAME	ELEMENT NAME	META-DATA NAME
book.dtd	title	title
book.dtd	author	author
book.dtd	keywords	keyword
photo.dtd	title	title
photo.dtd	GPS info	location
photo.dtd	date	date
photo.dtd	creator	author
⋮	⋮	⋮

FIG. 12

title	Practical File System Design with the Be File System
author	Domanic Giampaolo
keyword	BeOS, File System, Journaling, Index


10/11

FIG. 13

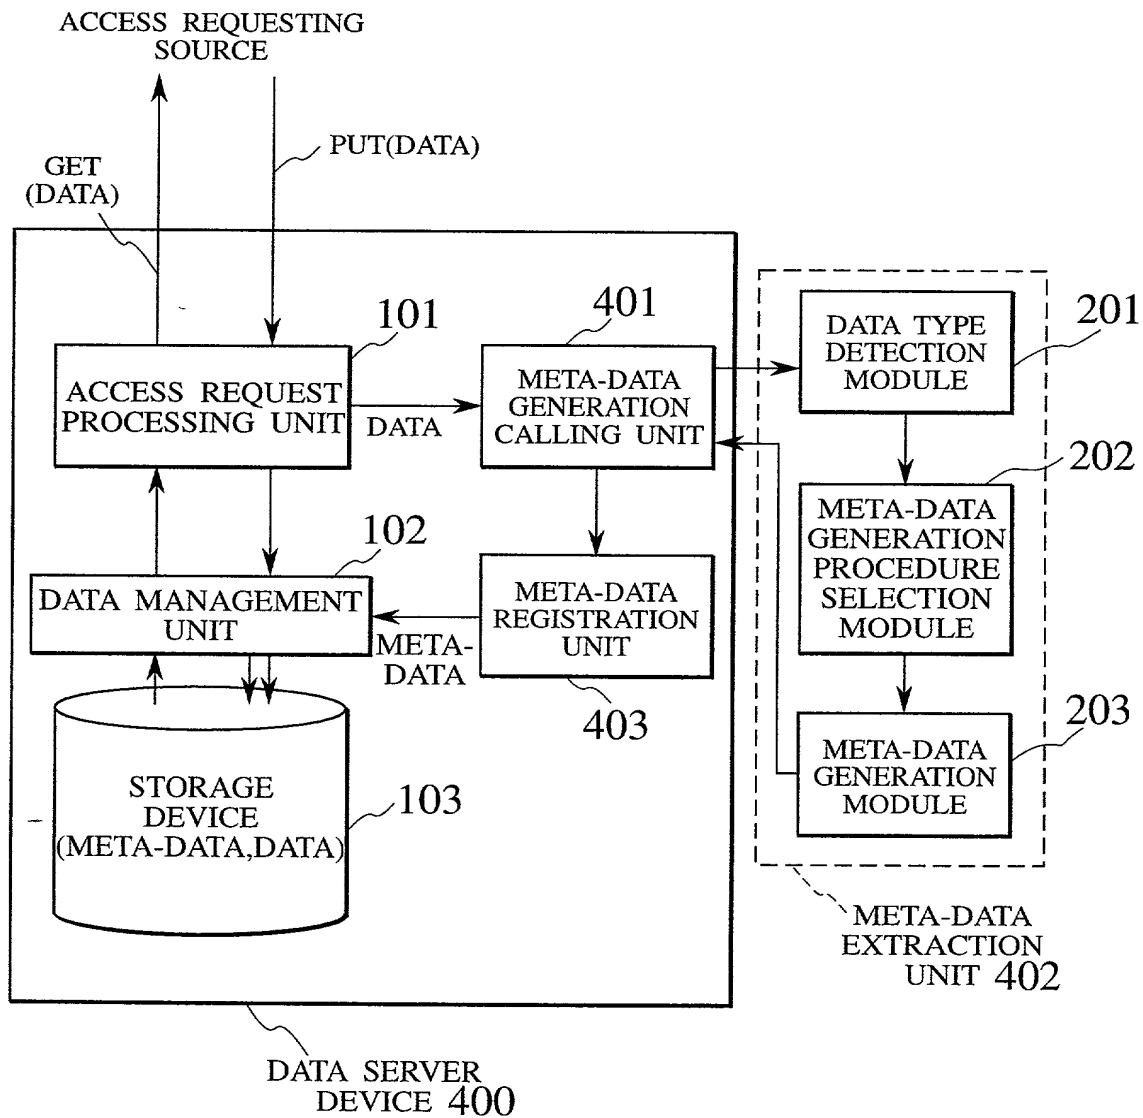

11/11

FIG. 14

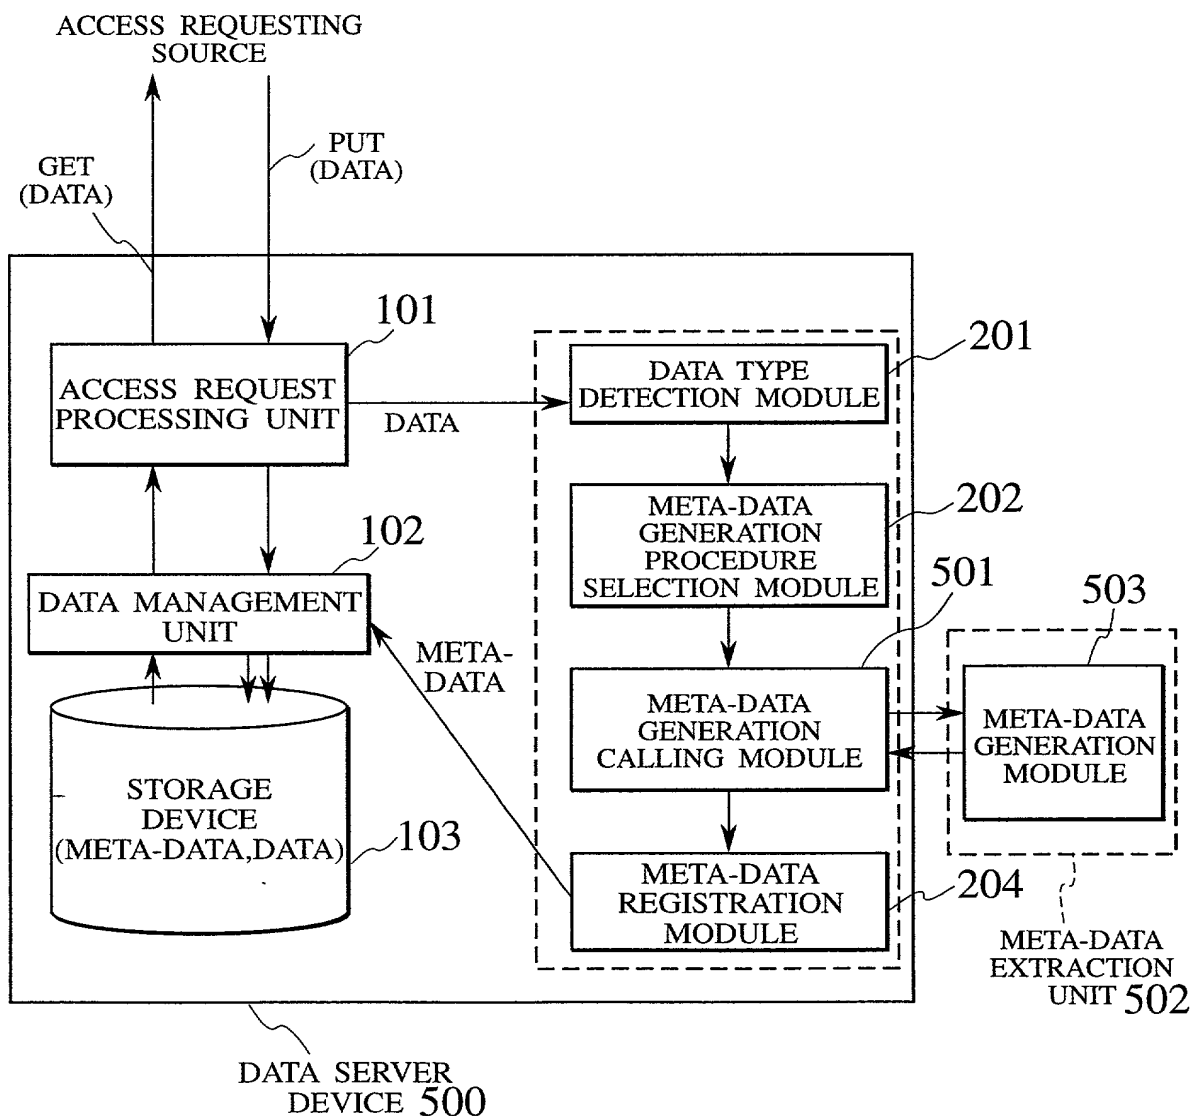

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者（下記の名称が複数の場合）であると信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

SCHEME FOR SYSTEMATICALLY REGISTERING

META-DATA WITH RESPECT TO VARIOUS TYPES

OF DATA

the specification of which

☒ is attached hereto.

☐ was filed on _____

as United States Application Number or

PCT International Application Number

_____ and was amended on

_____ (if applicable).

上記発明の明細書は、

☐ 本書に添付されています。

☐ ____月____日に提出され、米国出願番号または特許協定条約国際出願番号を_____とし、
(該当する場合) _____に訂正されました。

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration
(日本語宣言書)

私は、米国法典第35編119条 (a) - (d) 項又は365条 (b) 項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
P 11-077479

(Number)
(番号)

JAPAN

(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

私は、第35編米国法典119条 (e) 項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条 (c) に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、私自信の知識に基づいて本宣言書で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed
優先権主張

23/March/1999

(Day/Month/Year Filed)
(出願年月日)

☒ ☐
Yes No
はい いいえ
☐ ☐
Yes No
はい いいえ

(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration
(日本語宣言書)

委任状：私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。
(弁護士、または代理人の指名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: *(list name and registration number)*

Norman F. Oblon, Reg. No. 24,618; Marvin J. Spivak, Reg. No. 24,913; C. Irvin McClelland, Reg. No. 21,124; Gregory J. Maier, Reg. No. 25,599; Arthur I. Neustadt, Reg. No. 24,854; Richard D. Kelly, Reg. No. 27,757; James D. Hamilton, Reg. No. 28,421; Eckhard H. Kuesters, Reg. No. 28,870; Robert T. Pous, Reg. No. 29,099; Charles L. Gholz, Reg. No. 26,395; William E. Beaumont, Reg. No. 30,996; Robert F. Gnuse, Reg. No. 27,295; Jean-Paul Lavalleye, Reg. No. 31,451; Stephen G. Baxter, Reg. No. 32,884; Robert W. Hahl, Reg. No. 33,893; Richard L. Treanor, Reg. No. 36,379; Steven P. Weihrouch, Reg. No. 32,829; John T. Goolkasian, Reg. No. 26,142; Richard L. Chinn, Reg. No. 34,305; Steven E. Lipman, Reg. No. 30,011; Carl E. Schlier, Reg. No. 34,426; James J. Kulbaski, Reg. No. 34,648; Richard A. Nefeld, Reg. No. 35,299; J. Derek Mason, Reg. No. 35,270; Surinder Sachar, Reg. No. 34,423; Christina M. Gadiano, Reg. No. 37,628; Jeffrey B. McIntyre, Reg. No. 36,867; Paul E. Rauch, Reg. No. 38,591; William T. Enos, Reg. No. 33,128 and Michael E. McCabe, Jr., Reg. No. 37,182, with full powers of substitution and revocation.

書類送付先

Send Correspondence to:

OBLON, SPIVAK, McCLELLAND, MAIER & NEUSTADT, P.C.
FOURTH FLOOR
1755 JEFFERSON DAVIS HIGHWAY
ARLINGTON, VIRGINIA 22202 U.S.A.

直接電話連絡先：(名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)
(703) 413-3000

単独発明者または第一の共同発明者の氏名	Full name of sole or first joint inventor Tatsunori KANAI	
発明者の署名	Inventor's signature <i>Tatsunori Kanai</i>	Date March 14, 2000
住所	Residence Kanagawa, Japan	
国籍	Citizenship Japan	
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan	
第二の共同発明者の氏名	Full name of second joint inventor, if any Toshiki KIZU	
第二の共同発明者の署名	Second joint Inventor's signature <i>Toshiki Kizu</i>	Date March 14, 2000
住所	Residence Kanagawa, Japan	
国籍	Citizenship Japan	
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan	

(第三以降の共同発明者についても同様に記載し、署名すること)

(Supply similar information and signature for third and subsequent joint inventors.)

Japanese Language Declaration
(日本語宣言書)

第三の共同発明者の氏名	Full name of third joint inventor, if any Seiji MAEDA
第三の共同発明者の署名 日付	Third joint Inventor's signature Date <i>Seiji Maeda</i> March 14, 2000
住所	Residence Tokyo, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan

第四の共同発明者の氏名	Full name of fourth joint inventor, if any Takeshi YOKOKAWA
第四の共同発明者の署名 日付	Fourth joint Inventor's signature Date <i>Takeshi Yokokawa</i> March 14, 2000
住所	Residence Tokyo, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan

第五の共同発明者の氏名	Full name of fifth joint inventor, if any Hiroshi YAO
第五の共同発明者の署名 日付	Fifth joint Inventor's signature Date <i>Hiroshi Yao</i> March 14, 2000
住所	Residence Kanagawa, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan

第六の共同発明者の氏名	Full name of sixth joint inventor, if any Osamu TORII
第六の共同発明者の署名 日付	Sixth joint Inventor's signature Date <i>Osamu Torii</i> March 14, 2000
住所	Residence Kanagawa, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)

Japanese Language Declaration
(日本語宣言書)

第七の共同発明者の氏名	Full name of seventh joint inventor, if any Hirokuni YANO
第七の共同発明者の署名	Seventh joint Inventor's signature <i>Hirokuni Yano</i>
住所	Residence Tokyo, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan

第八の共同発明者の氏名	Full name of eighth joint inventor, if any Hisako TANAKA
第八の共同発明者の署名	Eighth joint Inventor's signature <i>Hisako Tanaka</i>
住所	Residence Tokyo, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan

第五の共同発明者の氏名	Full name of ninth joint inventor, if any
第九の共同発明者の署名	Ninth joint Inventor's signature
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

第十の共同発明者の氏名	Full name of tenth joint inventor, if any
第十の共同発明者の署名	Tenth joint Inventor's signature
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address